

Features

- 500mA RF Low-Dropout Regulator With Enable
- Ultralow-Noise: 40 μ VRMS(10Hz~100kHz)
- High PSRR: 70dB@1kHz
- Fast Start-Up Time (20 μ s)
- Excellent Load/Line Transient Response
- Low Dropout Voltage: 110mV@100mA
- Stable With a 1 μ F Ceramic Capacitor
- Available in Adjustable Voltage Version (0.6V to 5.5V)
- Built-in Current Limiter, Short-Circuit Protection
- ESD Protected up to 4KV (HBM),200V(MM)
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free. "Green" Device (Note 1)
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)

Applications

- RF: VCOs, Receivers, ADCs
- Cellular and Cordless Telephones
- Handheld Organizers
- Audio
- Bluetooth, Wireless LAN
- Tablet, MID

Description

The MC6300 series are a group of positive voltage regulators manufactured by CMOS technologies with high ripple rejection, ultra low noise, low power consumption and low dropout voltage, which can prolong battery life in portable electronics. The MC6300 series work with low-ESR ceramic capacitors, reducing the amount of board space necessary for power applications. The MC6300 series consume less than 0.1 μ A in shutdown mode and have fast turn-on time less than 50 μ s. The series are very suitable for the battery-powered equipments, such as RF applications and other systems requiring a quiet voltage source.


MCC Part Number	Device Marking
MC6300-ADJ	A6YM ⁽²⁾

Note:

1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
2. Y: year, M: month.


Low-Dropout CMOS Voltage Regulators

SOT23-5L

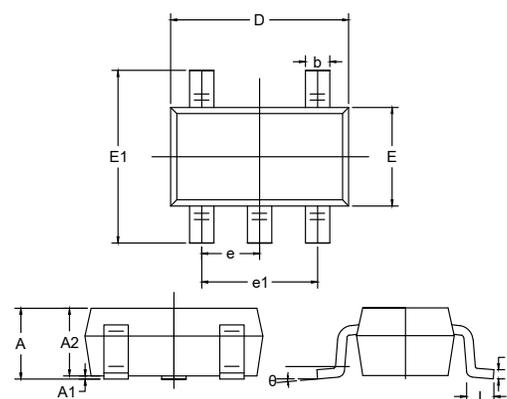


DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	0.041	0.049	1.05	1.25	
A1	0.000	0.004	0.00	0.10	
A2	0.041	0.045	1.05	1.15	
b	0.012	0.020	0.30	0.50	
c	0.004	0.008	0.10	0.20	
D	0.111	0.119	2.82	3.02	
E	0.059	0.067	1.50	1.70	
E1	0.104	0.116	2.65	2.95	
e	0.037(BSC)		0.950(BSC)		
e1	0.071	0.079	1.80	2.00	
L	0.012	0.024	0.30	0.60	
θ	0°	8°	0°	8°	


Suggested Solder Pad Layout



Functional Block Diagram

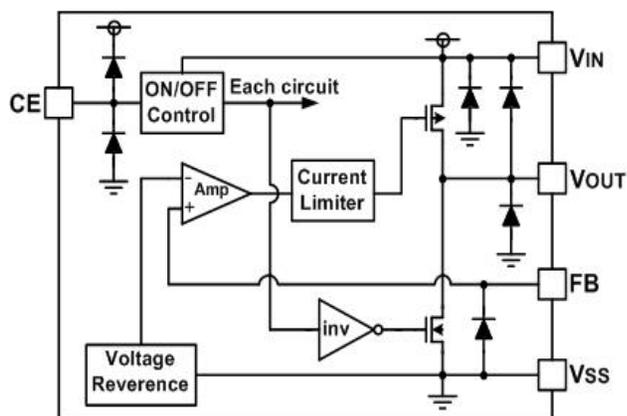


Pin Configuration and Functions (Top View)



Number	Name	Function
1	V_{IN}	Power input Pin
2	V_{SS}	Ground
3	CE	Chip Enable Pin
4	FB	Feedback Pin: Used to Set Output Voltage
5	V_{OUT}	Output Pin

Typical Application Circuit

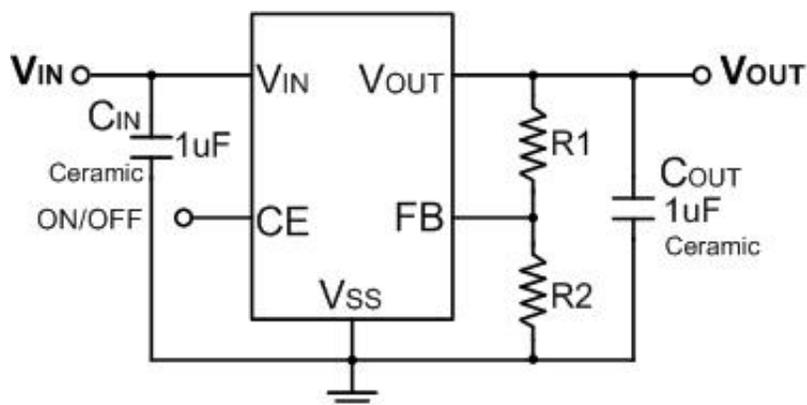

Absolute Maximum Ratings

- Input Voltage: $V_{SS} - 0.3V \sim V_{SS} + 8V$
- Output Current: 750mA
- Output Voltage: $V_{SS} - 0.3V \sim V_{IN} + 0.3V$
- BS Pin Voltage: 0.3V to 23V
- Operating Junction Temperature Range: $-40 \sim +85^{\circ}C$
- Storage Temperature Range: $-40 \sim +125^{\circ}C$
- Thermal Resistance: $258^{\circ}C/W$ Junction to Ambient
- Thermal Resistance: $82^{\circ}C/W$ Junction to Case
- Lead Temperature & Time: $260^{\circ}C$, 10s
- Power Dissipation: 380mW

*Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Electrical Characteristics

($V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified)







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage	V_{IN}		1.8 ⁽³⁾		7	V
Output Current	I_{OUT}	$V_{OUT} \geq 1.8V$	500			mA
Supply Current	I_{SS}	$I_{OUT}=0mA$		45	80	μA
Standby Current	I_{STBY}	$V_{CE}=0V$			0.1	μA
CE "High" Voltage	V_{CEH}		1.2		V_{IN}	V
CE "Low" Voltage	V_{CEL}				0.3	V
CE Pin Current		$V_{CE}=0V$	-1		1	μA
FB Voltage	V_{FB}	$I_{OUT}=1mA$	0.588	0.6	0.612	V
FB Pin Current		$V_{FB}=1.8V$			1	μA
Output Voltage Range			0.6		$5.5-V_{DO}$	V
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta V_{IN}}$	$I_{OUT}=10mA$, $V_{OUT} + 1V \leq V_{IN} \leq 7V$		0.01	0.2	%/V
Load Regulation	ΔV_{OUT}	$V_{IN}=V_{OUT}+1V$, $1mA \leq I_{OUT} \leq 100mA$		1		mV
Dropout Voltage ⁽⁴⁾	V_{dif}	$I_{OUT}=100mA$, $V_{OUT} \geq 3.0V$		110		mV
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T \times V_{OUT}}$	$I_{OUT}=10mA$, $-40^\circ C \leq T \leq +85^\circ C$		50		ppm
Current Limit	I_{LIM}		600	750		mA
Short Current	I_{SHORT}	$V_{OUT}=V_{SS}$		20		mA
Power Supply Ripple Rejection	PSRR	$f=100Hz$, $I_{OUT}=50mA$, $V_{OUT}=1.2V$		80		dB
		$f=1KHz$, $I_{OUT}=50mA$, $V_{OUT}=1.2V$		70		
		$f=10KHz$, $I_{OUT}=50mA$, $V_{OUT}=1.2V$		50		
Output Noise Voltage		$BW=10Hz$ to $100kHz$, $I_{OUT}=10mA$		40		μV_{RMS}
Time, start-up		$I_{OUT}=0mA$, $C_{OUT}=1\mu F$		20		μs

Note:


3. Minimum V_{IN} is 1.8V or $V_{OUT} + V_{DO}$, whichever is greater.

4. V_{dif} : The difference of output voltage and input voltage when input voltage is decreased gradually till output voltage equals to 98% of $V_{OUT}(E)$. Voltage Equals To 98% Of $V_{OUT}(E)$.

Curve Characteristics

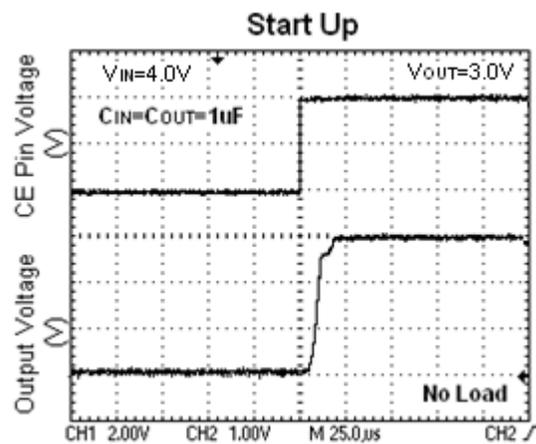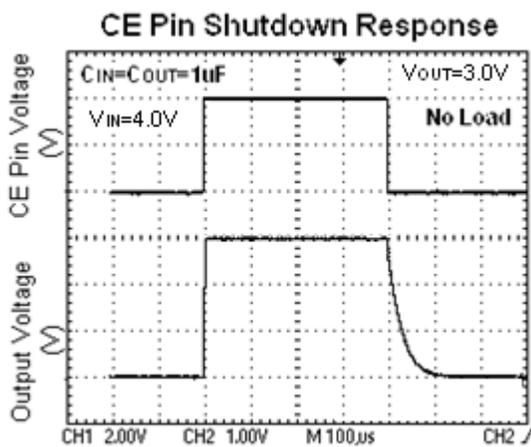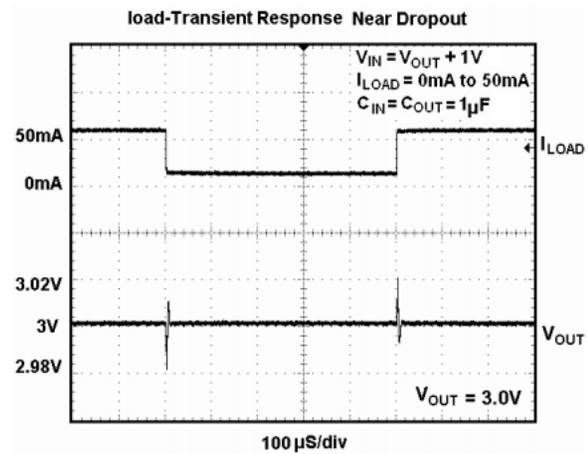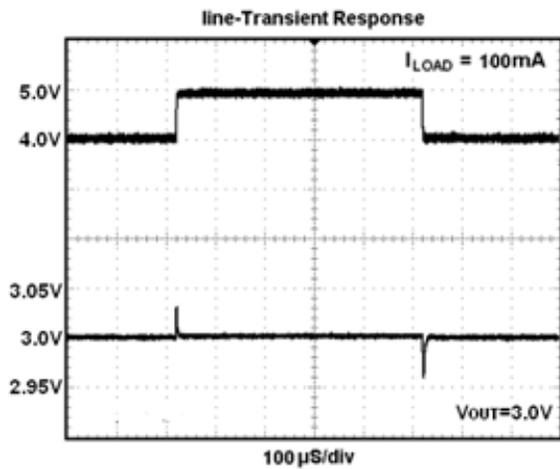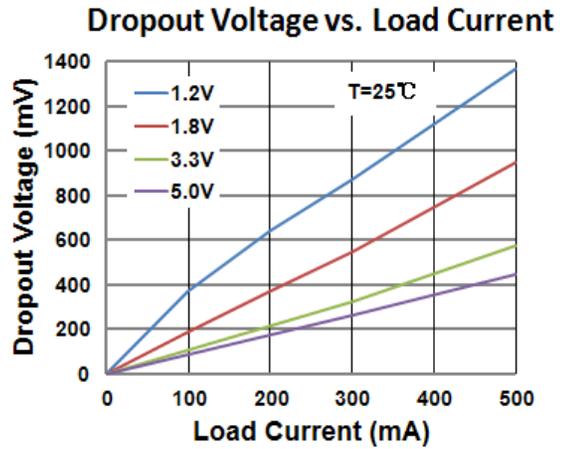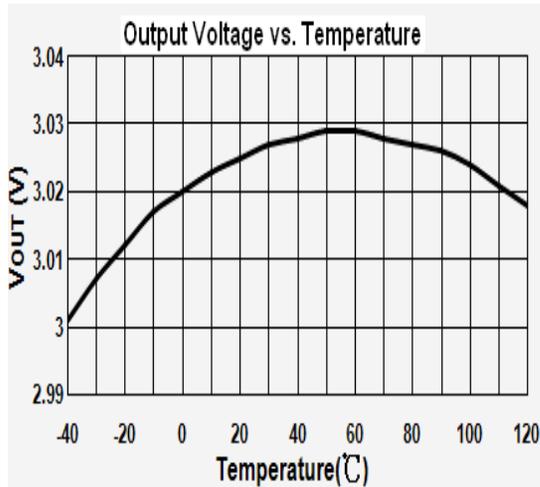

Curve Characteristics

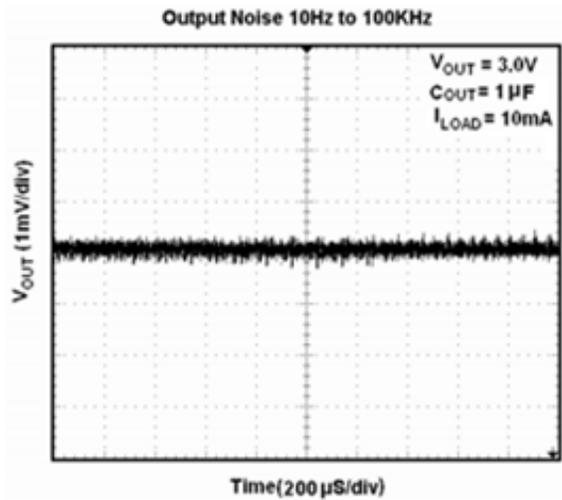

Application Information

Setting The Output Voltage

Figure 1 shows the typical application circuit with MC6300. The external resistor sets the output voltage according to the following equation:

$$V_{OUT} = 0.6V \times \left(1 + \frac{R1}{R2}\right)$$

Table 1. Resistor select for output voltage setting

V _{OUT}	R1	R2
1.2V	30.1K	30.1K
1.5V	45.3K	30.1K
1.8V	60.4K	30.1K
2.5V	95.3K	30.1k
2.8V	110K	30.1k
3.0V	120K	30.1K
3.3V	137K	30.1K
5.0V	221K	30.1k

Ordering Information

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.